

WP20-12IE 12Volt 20Ah

Specifications

Nominal Voltage(V) 12V

Nominal Capacity

20 hour rate	(1A to 10.50V)	20Ah
10 hour rate	(1.9A to 10.50V)	19Ah
5 hour rate	(3.4A to 10.20V)	17Ah
1 C	(20A to 9.60V)	12.67Ah
3 C	(60A to 9.60V)	8Ah

Weight Approx. 6.08kg(13.38Lbs.)

Internal Resistance (at 1KHz) Approx. 10 mΩ

**Maximum Discharge Current for
5 seconds:** 300A

Charging Methods at 25 (77)

Cycle use:

Charging Voltage 14.4 to 15.0V

Coefficient -5.0mv/ /cell

Maximum Charging Current : 6A

Standby use:

Float Charging Voltage 13.50 to 13.80V

Coefficient -3.0mv/ /cell

Operating Temperature Range

Charge -15 (5) to 40 (104)

Discharge -15 (5) to 50 (122)

Storage -15 (5) to 40 (104)

Charge Retention (shelf life) at 20 (68)

1 month 92%

3 month 90%

6 month 80%

Case Material ABS


(Option: UL94 HB & UL94 V-0 flame retardant)

Terminal F3




Dimensions


mm(inch)




F3
(M5 Bolts)

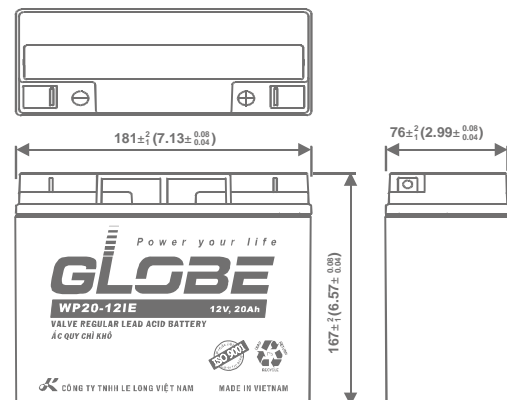


(v) FOR 12V BATTERY 13.0 Discharge Time VS. Discharge Current (25)

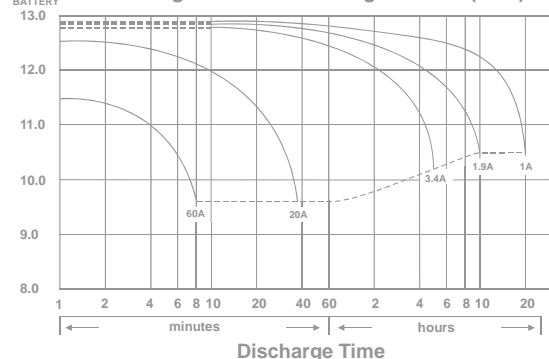


Effect of Temperature on Capacity 25 (77)

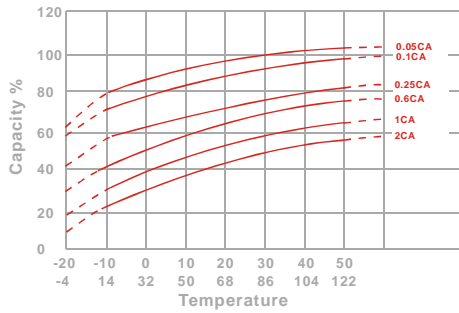


Capacity Retention Characteristic

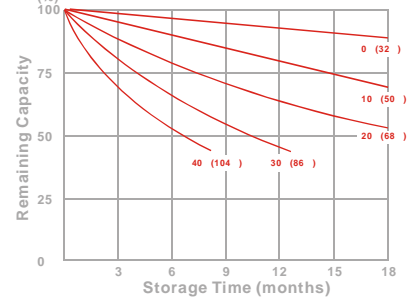

Trickle (or float) Service Life

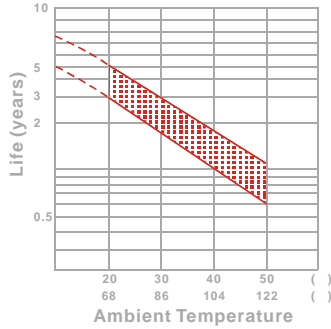

Cycle Service Life

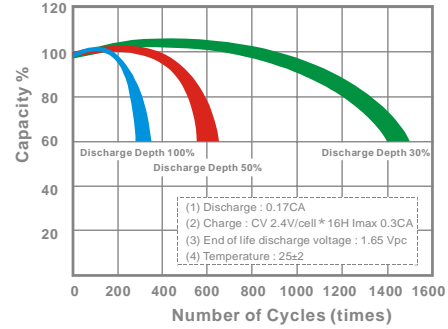

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25 (77)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	648	750	818	860	871	884	896
10	min	463	522	566	592	599	608	615
15	min	387	433	473	491	496	501	506
30	min	209	223	239	248	251	254	256
60	min	133	139	144	148	149	151	153
120	min	73.2	76.4	78.2	80.7	81.3	82.0	82.9
180	min	57.2	59.3	60.7	61.9	62.3	62.8	63.4
240	min	45.8	47.6	48.7	49.6	49.9	50.3	50.8
300	min	39.9	41.3	42.0	42.6	42.8	43.1	43.5
600	min	23.2	23.9	24.4	24.8	24.9	25.1	25.3
1200	min	12.3	12.7	13.0	13.2	13.3	13.4	13.5

- Discharge Rates in Amperes to Various End Voltages at 25 (77)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	68.2	73.9	77.5	80.7	82.0	83.4	85.8
10	min	45.8	48.9	51.4	53.5	54.4	55.4	57.0
15	min	34.7	37.3	39.0	40.5	41.1	41.7	42.6
30	min	18.5	20.0	21.1	22.0	22.2	22.6	23.2
60	min	11.1	11.7	12.2	12.6	12.7	12.9	13.1
120	min	6.25	6.47	6.61	6.73	6.77	6.82	6.89
180	min	4.73	4.90	5.00	5.08	5.11	5.15	5.21
240	min	3.88	3.97	4.04	4.09	4.11	4.14	4.17
300	min	3.41	3.48	3.53	3.57	3.58	3.60	3.62
600	min	1.97	2.00	2.02	2.04	2.05	2.06	2.07
1200	min	1.00	1.03	1.05	1.07	1.08	1.09	1.10

All data on the spec. sheet is an average value:

The tolerance range : X<6min(+15%~-15%), 6min X<10min(+12%~-12%), 10min X < 60min(+8%~-8%), X 60min(+5%~-5%)

261112-1B-V



CÔNG TY TNHH LELONG VIỆT NAM

40 Bà Chánh Thâu, KP2, Thị Trấn Bến Lức Huyện Bến Lức, Tỉnh Long An
 Cụm Công Nghiệp Đức Mỹ, Xã Đức Hòa Đông, Huyện Đức Hòa, Tỉnh Long An

TEL:+84-72-3872213
 TEL:+84-72-3779666

FAX:+84-72-3872350
 FAX:+84-72-3779476